

Enhanced Standard Wire-cut EDM

VN600Q



Standard Features

- Linear motor (X/Y/U/V axis)
- Absolute linear scales (X/Y/U/V axis)
- Sodick Motion Controller
- Ceramic work-zone
- Remote controller
- Triple filtration system
- Improved ease of operation
- Four-sided work table
- Advanced wire tension control
- LN3W generator
- SODICK Fine Corner Control
- Energy saving circuit
- Automatic water level control
- Fixed Jet AWT (Automatic wire threader)
- Wire end remover
- Dielectric cooling unit
- Voltage stabiliser
- LAN interface
- 15" TFT colour screen
- Work light
- Energy saving pump system
- USB port

Technical Specifications

X-/Y-/Z- axis stroke (mm)	600 x 400 x 310
U-/V-axis stroke (mm)	90 x 90
Taper angle (120 mm)	±15°
Worktank dimensions (W x D mm)	1,150 x 840
Max. workpiece weight (kg)	850
Wire diameter (mm)	0.1 ~ 0.3
Distance from floor to table top (mm)	1,000
Max. wire speed (mm/sec)	420
Machine tool weight (kg)	3,684
Machine installation dimensions (W x D mm)	3,675 x 4,330
Total power input	3-phase 50/60 Hz 11.5 kVA

Dielectric tank

External dimensions (W x D x H, mm)	1,045 x 2,500 x 1,910
Empty weight (kg)	510
Capacity (lit)	970
Dielectric fluid filtration system	3 Replaceable paper filters (internal pressure)

Options

Taper Flex NEO
AVC
Jumbo Wire Feeder
UPS
L-cut (Wire Chopper)
WS4P/ 5P rotary table




create your future

Linear Motor Drive Wire-cut EDM


VN600Q




Front View

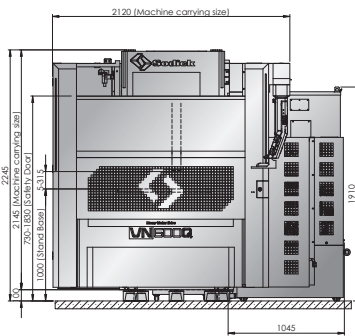

Side View

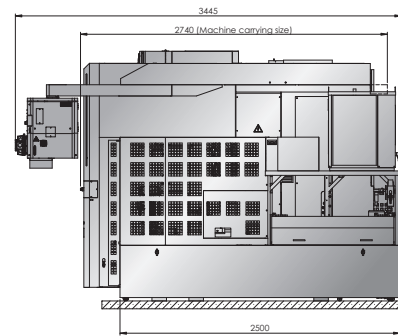

Due to ongoing research, specifications are subject to change without prior notice.

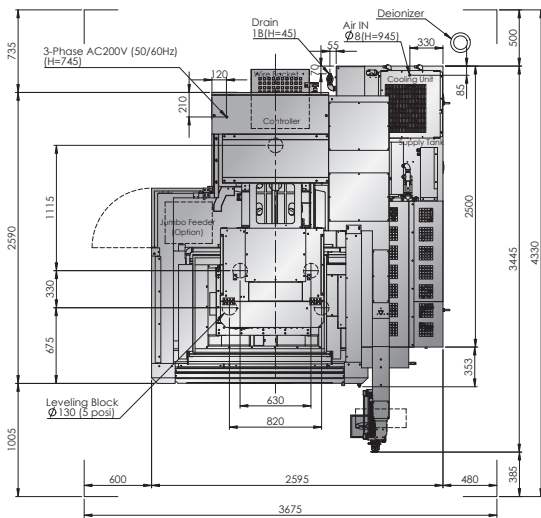

Top View

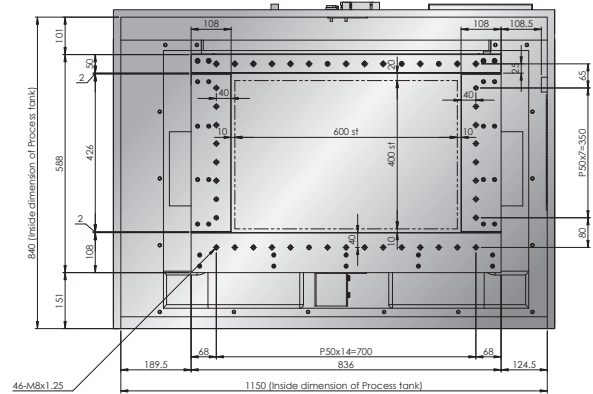


Table Drawing



create your future

Sodick Europe Ltd.

Agincourt Road
Warwick, CV34 6XZ
United Kingdom

Sodick Contact

Phone +44 (0) 19 2669 8888
email europe@sodick.eu
online www.sodick.eu